

FRONT WHEEL

MID WHEEL

REAR WHEEL



	F3 <i>Corpus</i>	F5 <i>Corpus</i>	F5 <i>Corpus VS</i>	M3 <i>Corpus</i>	M5 <i>Corpus</i>	M300 <i>HD</i>	C350
MAX USER WEIGHT	300 lbs	300 lbs	300 lbs	300 lbs	300 lbs	450 lbs	300 lbs
MAX SPEED	6 mph 5 mph <i>without anti-tips</i>	7.5 mph 6 mph <i>without anti-tips</i>	7.5 mph	6 mph	7.5 mph	5 mph	5.5 mph 6.5 mph
RANGE	13 mi*	16 mi*	16 mi*	13 mi*	16 mi*	17.8 mi*	22 mi*
BASE WIDTH	24"	25.5"	25.5"	24"	25"	26"	24.5"
BASE LENGTH	40" <i>with anti-tips</i> 36" <i>without anti-tips</i>	42" <i>with anti-tips</i> 38" <i>without anti-tips</i>	43"	35.5"	37.5"	38"	36"
MIN TURNING RADIUS	26.5"	30"	30"	20.5"	21.5"	22"	26"
GROUND CLEARANCE	3"	3"	3"	3"	3"	3"	3"
WEIGHT WITH BATTERIES	386 lbs (G34) 405 lbs (G24)	410 lbs (G24)	421 lbs (G24)	385 lbs (Gr 34), 405 lbs (Gr 24)	420 lbs (Gr 24)	425 lbs (G34) 445 lbs (G24)	367 lbs (G34)
SEAT-TO-FLOOR HEIGHT	17.5", 18.5", 19.5"	17.5", 18.5", 19.5"	17.5", 18.5", 19.5"	17.5", 18.5", 19.5"	17.5", 18.5", 19.5"	18", 19", 20" (elevator) 18", 19", 20" (fixed)	17.5" (elevator) 17.5", 18.25", 19" (fixed)
SEAT ELEVATOR	<i>Optional 12"</i>	<i>Optional 14"</i>	14"	<i>Optional 12"</i>	<i>Optional 14"</i>	<i>Optional 8"</i>	<i>Optional 8"</i>
POWER TILT OPTIONS	0° - 50° <i>Posterior</i> 5°, 10°, 20° & 30° <i>Anterior</i>	0° - 50° <i>Posterior</i> 5°, 10°, 20° & 45° <i>Anterior</i>	0° - 50° <i>Posterior</i>	0° - 50° <i>Posterior</i> 5°, 10° & 20° <i>Anterior</i>	0° - 50° <i>Posterior</i> 5°, 10° & 20° <i>Anterior</i>	0° - 45° <i>Posterior</i>	0° - 50° <i>Posterior</i>
RECLINE OPTIONS	85° - 120° (manual) 85° - 180° (power)	85° - 120° (manual) 85° - 180° (power)	85° - 180° (power)	85° - 120° (manual) 85° - 180° (power)	85° - 120° (manual) 85° - 180° (power)	85° - 120° (manual) 85° - 150° (power)	85° - 120° (manual) 85° - 175° (power)
LEGREST ANGLE	85° - 170°	85° - 170°	90° - 180°	85° - 170°	85° - 170°	85° - 175° (manual) 85° - 175° (power)	85° - 170°
SEAT DEPTH	14" - 22" (by 1" incr.)	14" - 22" (by 1" incr.)	14" - 22" (by 1" incr.)	14" - 22" (by 1" incr.)	14" - 22" (by 1" incr.)	19" - 25" (by 1" incr.)	14" - 22" (by 1" incr.)
SEAT WIDTH	17", 19", 21", 23"	17", 19", 21", 23"	17", 19", 21", 23"	17", 19", 21", 23"	17", 19", 21", 23"	19", 21", 23", 25"	17", 19", 21", 23"
BACKREST HEIGHT	20", 23" - 28" (by 1" incr.)	20", 23" - 28" (by 1" incr.)	23" - 28" (by 1" incr.)	20", 23" - 28" (by 1" incr.)	20", 23" - 28" (by 1" incr.)	21", 24" - 29" (by 1" incr.)	20", 23" - 28" (by 1" incr.)

All specifications may vary based upon configuration. | *Actual driving range will vary based on driving and battery conditions.



“Every disabled person has the right to have his or her handicap compensated as far as possible by aids with the same technical standards as those we all use in our everyday lives.”

—Dr. Per Uddén
Permobil Founder



PERMOBIL FAMILY

Permobil, TiLite, and ROHO®. Three brands. One Mission. For over 45 years, Permobil has been a leader in the complex rehabilitation power wheelchair industry. ROHO became incorporated in 1973, and TiLite has been around for almost three decades, with custom manual wheelchairs being fabricated since the 1990s. Together there is over 90 years of business experience in complex seating and mobility products. And together, we are better able to innovate and create healthcare solutions.


By our commitment to using technology to meet the user's needs, the Permobil Group continues to lead the industry with a diverse line of innovative, complex rehabilitation solutions. This includes the user-focused process of custom fitting and configuration of TiLite manual wheelchairs, the ground breaking anterior tilt technology of the Permobil F-Series, and the decades of research demonstrating the effectiveness of ROHO DRY FLOTATION® Technology. It's not just the "power of mobility" anymore, it's a broad commitment to healthcare solutions.

FRONT WHEEL

MID WHEEL

REAR WHEEL

PEDIATRIC

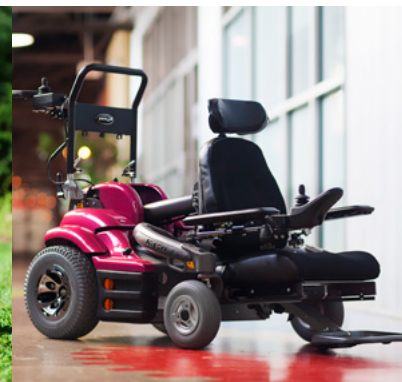

Koala

K300
PS Jr.

M300
PS Jr.

K450
MX

80 lbs

165 lbs

165 lbs

125 lbs

4 mph

5 mph | 6.5 mph

6 mph

5 mph

15 mi*

16 mi*

13 mi*

17 mi*

23"

24"

24"

25"

32"

40"

36.5"

35"

21"

25"

20"

28"

2.5"

3"

3"

2.5"

226 lbs (M40)

272 lbs (G34)

313 lbs (G34) | 333 lbs (G24)

337 lbs (G34)

15" (elevator)

16.5" (elevator) | 16.5", 17.25", 18.5" (fixed)

17" (elevator) | 17", 17.75", 18.5" (fixed)

3" - 26" (elevator)

Optional 8"

Optional 8"

Optional 8"

Optional 8"

0° - 25°

0° - 45° (power or manual)

0° - 45° (power or manual)

0° - 45°

85° - 120° (manual)

85° - 120° (manual)

85° - 120° (manual)

85° - 105° (manual)

90° - 150° (manual)

70° (swing away) | 90° - 150° (center mount)

70° (swing away) | 90° - 150° (center mount)

90° - 125° (manual)

10", 12", 14"

10" - 18"

10" - 18"

10" - 18" (by 1" incr.)

10", 12", 14"

11" - 16" (by 1" incr.)

11" - 16" (by 1" incr.)

10", 12", 14", 16"

14", 16", 20"

16.5" - 22.5" (by 1" incr.)

16.5" - 22.5" (by 1" incr.)

14", 16", 20" (MX) | 16.5" - 22.5" (PS Jr)

All specifications may vary based upon configuration. | *Actual driving range will vary based on driving and battery conditions.

WWW.PERMOBIL.COM

permobil
POWER WHEELCHAIRS



permobil | FOR THE RIDE OF LIFE